

HYPPO 7000

SOLEMYO OPERA BLUEBUS 24V 230V

For swing gates with leaves up to 3 m, also ideal for large pillars.

Electromechanical gear motor, surface mounted, also in 24 Vdc version with magnetic encoder, with articulated arm.

Single model for right and left leaves.

Two irreversible versions, with 230 Vac (HY7005) and 24 Vdc (HY7024) power supplies with magnetic encoder.

Fewer connections mean **quicker installation.**

Pre-wired, incorporated double limit-switch both during opening and closing (HY7005).

Easy and quick to install: thanks to fewer connections and nothing welded to the gates.

Long-lasting: solid metal mechanics.

Compact: shockproof bodywork with no sharp corners.

Recommended control units:

Mindy A6F, A60, A700F;
for HY7024 Moonclever MC824H.

24 Vdc version with magnetic encoder.

Perfect for intensive use, compatible with the control unit Moonclever MC824H:

- simple programming, by means of a single key;
- self-learning of opening and closing limit positions;
- automatic fault diagnostics;
- programming of pause time;
- pedestrian pass door;
- deceleration on opening and closing;
- obstacle detection with dual technology;
- operation in event of power failure by means of optional rechargeable batteries (PS324);
- provision for connection of latest generation resistive sensitive edges.



DIE-CAST, ALUMINIUM, KEY-OPERATED UNLOCK SYSTEM, COMPLETE WITH PROTECTED KEY. DESIGNED TO ACCOMMODATE EXTERNAL RELEASE, TOO

STURDY, ANTI-SHEARING ARM, GALVANISED AND PAINTED; STRENGTHENED IN THOSE AREAS SUBJECTED TO GREATER MECHANICAL STRESS

CODE	DESCRIPTION	PACK/PALLET
HY7024	IRREVERSIBLE, 24 Vdc, WITH MAGNETIC ENCODER, WITH SHEAR-PROOF ARTICULATED ARM, GALVANIZED AND PAINTED	16
HY7005	IRREVERSIBLE, 230 Vac, WITH STURDY ARTICULATED SHEAR-PROOF ARM, GALVANIZED AND PAINTED, WITH LIMIT SWITCH ON OPENING AND CLOSING	16


TECHNICAL SPECIFICATIONS

CODE	HY7024	HY7005
ELECTRICAL DATA		
POWER SUPPLY (Vac 50 Hz)*	-	230
POWER SUPPLY (Vdc)	24	-
ABSORPTION (A)	5	1.2
POWER (W)	120	250
PERFORMANCE DATA		
SPEED (rpm)	2	1.7
TORQUE (Nm)	250	400
WORK CYCLE (%)	80	30
DIMENSIONAL AND GENERAL DATA		
PROTECTION LEVEL (IP)	43	
WORKING TEMP. (°C MIN/MAX)	-20 ÷ +50	
DIMENSIONS (mm)	350x165x242 h	
WEIGHT (kg)	13	



*60 Hz version available on request.

UTILISATION LIMITS

- A Standard arm
- B Arm with accessory HYA12

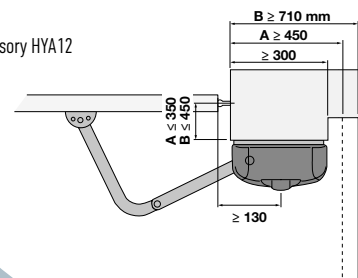

DIMENSIONS

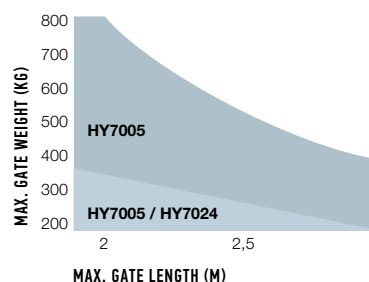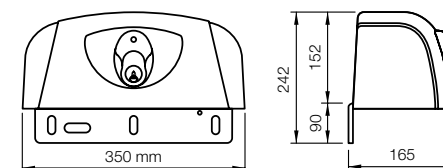

N.B. The above values are valid if the motor is used with standard accessories. The shape, the height of the gate and the weather conditions can considerably reduce the values shown in the graph to the side. Use in windy areas 230 Vac models.