

RUN 1500

SOLEMYO OPERA BLUEBUS 24V

For sliding gates weighing up to 1500 kg.

Versions with electromechanical limit switch (RUN1500) and with inductive limit switch (RUN1500P).

User-friendly: the BlueBUS technology, enables to power and control a maximum of 7 couples of photocells using two wires only.

Practical: the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside the motor.


Advanced: the temperature sensor adapts the motor force to weather conditions, setting the thermal cut-out protection accordingly; a master/slave selection automatically synchronises 2 motors, enabling the automation of sliding gates with two opposing leaves.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light. 8 programming levels.

Safe: acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.

Sturdy: aluminium release handle for easy opening.

Very quiet: gear motor on bearings.

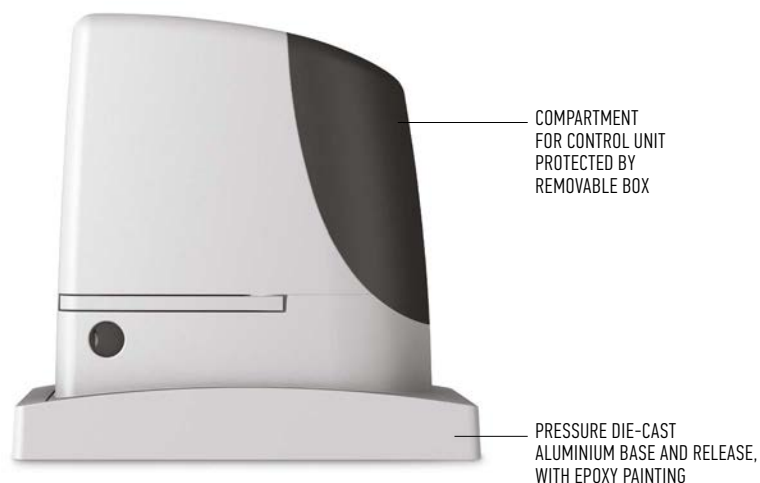

| CODE | DESCRIPTION | PACK/PALLET |
|-----------------|---|-------------|
| RUN1500 | IRREVERSIBLE, 24 Vdc, WITH BUILT-IN CONTROL UNIT, WITH ELECTROMECHANICAL LIMIT SWITCH, FOR SLIDING GATES WEIGHING UP TO 1500 kg | 12 |
| RUN1500P | IRREVERSIBLE, 24 Vdc, WITH BUILT-IN CONTROL UNIT, WITH INDUCTIVE LIMIT SWITCH, FOR SLIDING GATES WEIGHING UP TO 1500 kg | 12 |

TECHNICAL SPECIFICATIONS

| CODE | RUN1500/1500P |
|-------------------------------------|---------------|
| ELECTRICAL DATA | |
| POWER SUPPLY (Vac 50/60 Hz) | 230 |
| ABSORPTION (A) | 2 |
| POWER (W) | 400 |
| PERFORMANCE DATA | |
| SPEED (m/s) | 0.25 |
| FORCE (N) | 1000 |
| WORK CYCLE (CYCLES/HOUR) | 60 |
| DIMENSIONAL AND GENERAL DATA | |
| PROTECTION LEVEL (IP) | 44 |
| WORKING TEMP. (°C MIN/MAX) | -20 ÷ +50 |
| DIMENSIONS (mm) | 400x255x390 h |
| WEIGHT (kg) | 19 |

DIMENSIONS

